

Dante® Audio Analogue Decoder

Description

Our DA11ADE-V2 has been designed to decode two Dante® digital signals to two unbalanced or balanced analogue audio channels.

The DA11ADE-V2 is a plug & play device that is powered using either PoE (Power Over Ethernet) from any PoE network switch or via local a 12V power supply input.

The DA11ADE-V2 also supports AES67 RTP audio transport. The in-built web interface module can be used for configuration and control of the device.


Key Features

- Decodes two Dante® digital signals to two unbalanced or balanced analogue audio channels
- Supports 44.1, 48, 88.2 & 96 KHz sample rates @ 16/24/32 Bit
- Configurable Dante® device latency (supports 2-10ms configurable using Dante® Controller)
- Supports AES67 RTP audio transport
- Web interface module for control and configuration of the device
- Features Class 0 802.3af PoE for powering of product from any PoE switch
- Local 12V power supply input for when network switch does not support PoE*
- Dante® is a registered trademark of Audinate Pty Ltd

* PS121PH power supply sold separately

Specifications

- **Audio Input Connectors:** 1 x RJ45, female (100 Mbps Dante® network)
- **Audio Output Connectors:** 6-PIN Phoenix connector (2ch balanced/unbalanced analogue audio)
- **Casing Dimensions (L x W x H):** 120mm x 47mm x 26mm
- **Shipping Weight:** 0.3 Kg
- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature:** -4°F to 140°F (-20°C to 60°C)
- **Power Supply:** Class 0 IEEE 802.3af PoE PD or 12V/1A DC 2-PIN Phoenix connector

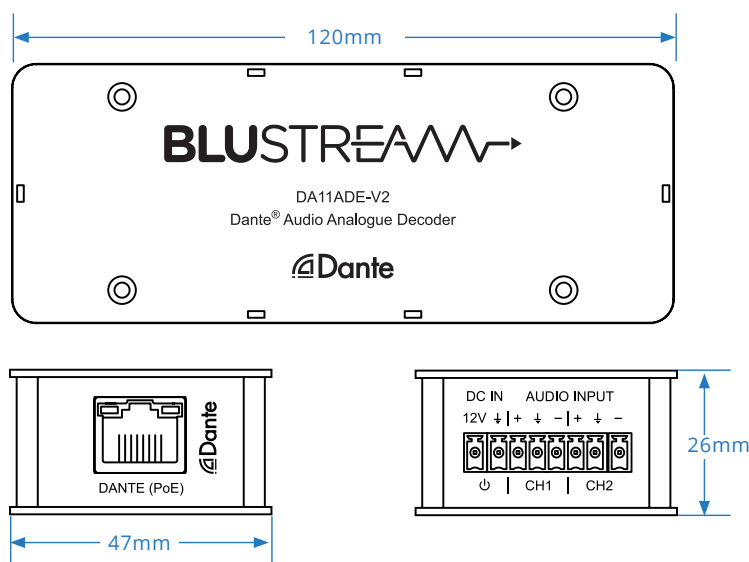

Regulatory Compliance



Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.