

Dante® Audio Analogue Encoder

Description

Our DA11AEN has been designed to encode unbalanced or balanced 2ch analogue audio to a Dante® digital signal.

The DA11AEN allows any non-Dante® audio source such as mixing consoles, amplifiers, computers and Blustream Matrix products or distribution products to be connected as a source within a Dante® network.

The DA11AEN is a plug & play device that is powered using either PoE (Power over Ethernet) from any PoE network switch or via local 12v power supply input (sold separately).

The DA11AEN also supports AES67 RTP audio transport with independent sensitivity adjustment for each channel as required.


Key Features

- Encodes unbalanced or balanced 2ch analogue audio to a Dante® digital signal
- Supports 44.1, 48 & 96 KHz sample rates @ 24 Bit
- Configurable Dante® device latency (supports 1, 2 or 5ms configurable using Dante® Controller)
- Independent gain control per channel: +24dBu to -10dBV
- Supports AES67 RTP audio transport
- Features Class 1 802.3af PoE for powering of product from any PoE switch
- Local 12v power supply input for when network switch does not support PoE*
- Dante® is a registered trademark of Audinate Pty Ltd

* PS121PH power supply sold separately

Specifications

- **Audio Input Connectors:** 6-PIN Phoenix connector (2ch balanced / un-balanced analogue audio)
- **Input Impedance:** 25k Ohm (balanced), 12.5k Ohm (unbalanced)
- **Audio Input Connectors:** 6-Pin Phoenix connector (2ch balanced/un-balanced analogue audio)
- **Input Impedance:** 25k Ohm (balanced), 12.5k Ohm (unbalanced)
- **Audio Output Connectors:** 1x RJ45, female (100Mbps Dante® network), PoE
- **Casing Dimensions (W x H x D):** 120mm x 26mm x 47mm
- **Shipping Weight:** 0.3kg
- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature:** -4°F to 140°F (-20°C to 60°C)
- **Power Supply:** Class 1 IEEE 802.3af PoE or 12v/1A DC 2-Pin Phoenix connector

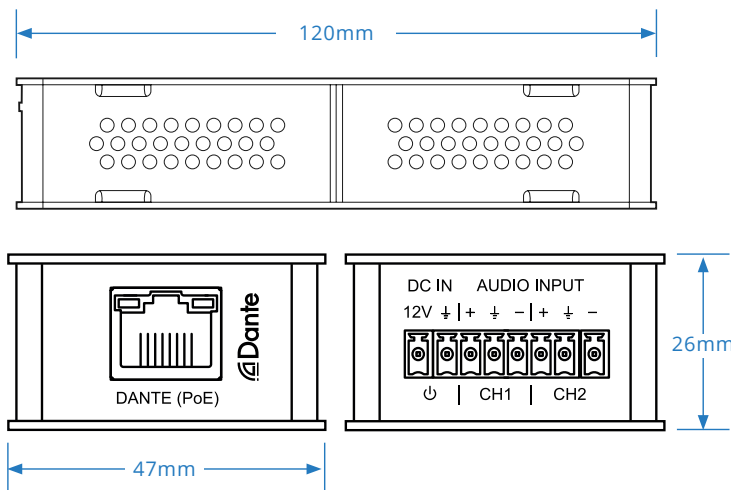

Regulatory Compliance



CAN ICES-3 (B)/NMB-3(B)

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.