


Digital to Analogue Audio Converter

Description

Our DAC12AU is designed to convert either coaxial or optical signals from a digital signal to analogue stereo audio. The DAC12AU also includes a digital converter which converts optical audio in to a coaxial digital output. This provides the perfect cost effective solution when connecting the digital audio output from a TV display to an analogue input on an amplifier. The DAC12AU utilises 192kHz sample rates for enhanced sound reproduction.

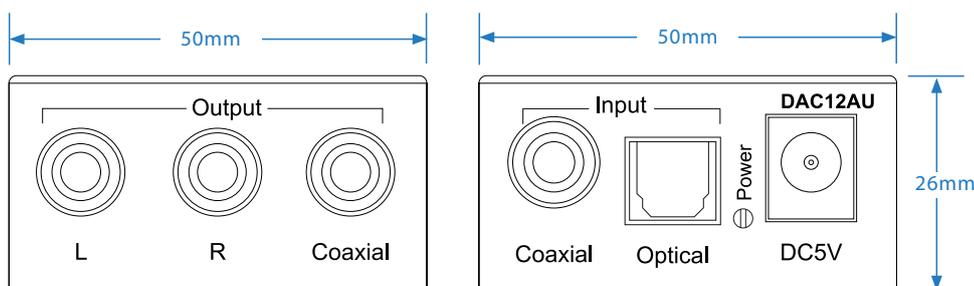

Key Features

- DAC (Digital to Analogue Audio Converter) converts either optical or coaxial digital to analogue stereo Left / Right audio output
- Converts Optical digital audio input to Coaxial digital audio output
- Auto-detects digital connection in use
- Optical digital input has priority over coaxial digital input
- Outputs Coaxial digital and analogue L/R audio concurrently*
- Supports sample rates 32 kHz, 44.1kHz, 48 kHz, 96 kHz & 192 kHz up to 24-bit resolution
- Plug-and-play

**DAC12AU does not down mix Dolby / dts / multi-channel audio signals*



Connectivity

- **Audio Input Connectors:** 1 x Optical digital & 1 x Coaxial RCA (S/PDIF)
- **Audio Output Connectors:** 2 x Analogue stereo left/right & 1 x Coaxial RCA (S/PDIF)

Included Accessories

- Power Supply
- 5V/1A DC barrel connector

Regulatory Compliance



Specifications

- **Shipping Weight:** 0.4kg
- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature :** -4°F to 140°F (-20°C to 60°C)
- **Dimensions (W x H x D):** 50mm x 26mm x 42mm

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.